


В -

## Available in any length required

- Available with carbide or PTA overlays
- Specially formulated steel
- Easily welded to any crawler track shoe
- Improved traction
- Target hardness of 50+ HRC

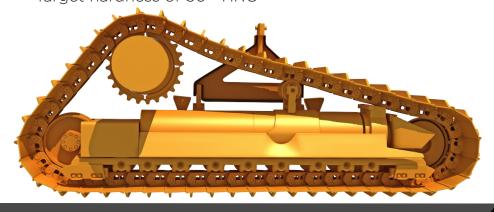

Profile	Α	В	С
А	1.25"	0.63"	0.38"
	32 mm	16 mm	10 mm
С	1.50"	0.88"	0.56"
	38 mm	22 mm	14 mm
Е	1.50"	0.75"	0.38"
	38 mm	19 mm	10 mm
G	1.75"	1.00"	0.56"
	45 mm	25 mm	14 mm
Н	2.06"	1.00"	0.56"
	52 mm	25 mm	14 mm
К	1.25"	0.75"	0.56"
	32 mm	19 mm	14 mm
L	1.00"	0.63"	0.44"
	25 mm	16 mm	11 mm
М	2.38"	1.38"	1.00"
	61 mm	35 mm	25 mm
S	2.00"	1.13"	1.00"
	51 mm	29 mm	25 mm
Т	1.50"	1.25"	1.00"
	38 mm	32 mm	25 mm