

## **RV WEAR CAPS**


- Cost effective solution to protect high wear areas
- Base welds to high wear areas
- Caps are easily changed without hammers or cutting torches





Insert T-Nut into base. Rotate 90 degrees. Cap completely covers base and holds nut captive. Cap is held In place with single bolt.

| Part Number  | Description       | Dimensions   | Weight             | Hardware                                      |
|--------------|-------------------|--|--------------------|---|
| MAWC1008B    | Base              | 9.00" x 7.00" x 1.60"<br>229 mm x 178 mm x 41 mm   | 20.2 lb<br>9.16 kg | Bolt - MAWC<br>050BPT<br>Nut - MAWC<br>050NPT |
| MAWC100802   | Low Profile Cap   | 10.00" x 8.00" x 2.00"<br>254 mm x 203 mm x 51 mm  | 26.1 lb<br>11.8 kg |   |
| MAWC1209B    | Base              | 11.00" x 8.00" x 2.00"<br>279 mm x 203 mm x 51 mm  | 34.6 lb<br>15.7 kg | Bolt - MAWC<br>075BPT<br>Nut - MAWC<br>075NPT |
| MAWC120903   | Low Profile Cap   | 12.00" x 9.00" x 3.00"<br>305 mm x 229 mm x 76 mm  | 47.7 lb<br>21.6 kg |   |
| MAWC1209035  | Standard Cap      | 12.00" x 9.00" x 3.50"<br>305 mm x 229 mm x 89 mm  | 63.5 lb<br>28.8 kg |   |
| MAWC120904   | Heavy Duty<br>Cap | 12.00" x 9.00" x 4.00"<br>305 mm x 229 mm x 102 mm | 80.6 lb<br>36.6 kg |   |
| MAWC1409275T | Tapered Cap       | 14.00" x 9.00" x 2.75"<br>356 mm x 229 mm x 70 mm  | 52.6 lb<br>23.9 kg |   |

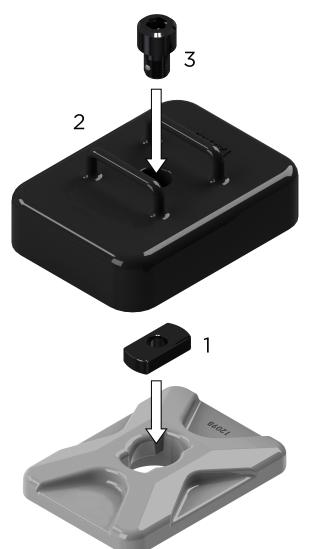





Standard





**Heavy Duty** 

**Low Profile** 

Caterpillar® and other identities and/or trademarks referred to in this publication are the registered marks of the entities noted herein. The use of any trademarks of others than Black Cat Wear Parts Ltd. are solely and exclusively for identification, informational, comparative, and descriptive purposes. Black Cat Wear Parts Ltd. is not affiliated with any owner of such registered marks and does not make, use, or sell any products manufactured by any such entity identified in this publication.

www.blackcatwearparts.com sales@blackcatwearparts.com +1-780-465-6666 1-800-661-6666

STRONG ENOUGH TO ANSWER ANY CALL! 960.0824